


90-1105-41-A

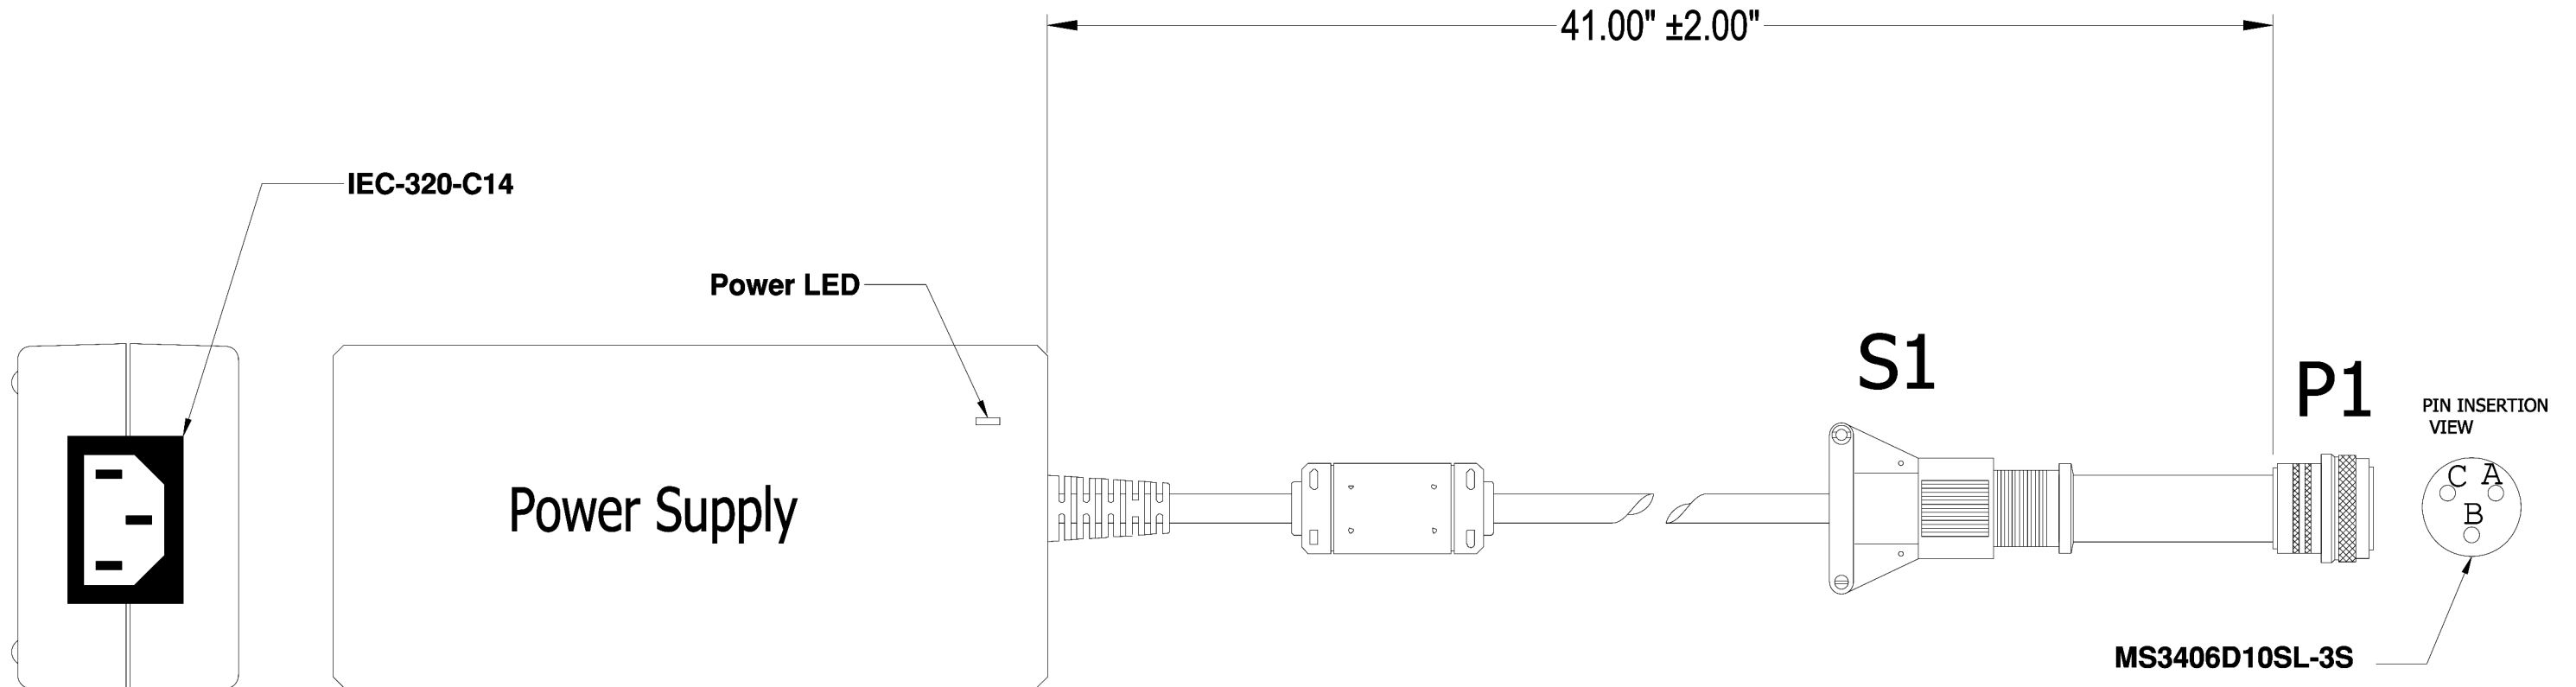

<b>P/S - AC Power Input</b>
IEC-320-C14

<b>Accessories</b>
AC Line Cord, Shielded, 6 ft Cable

Power Supply Characteristics		
Input (IEC-320-C14)	AC Voltage (V)	90 – 264
	AC frequency (Hz)	47 – 63
Output (P1)	DC Voltage (V)	+12
	Current (A)	8.35
Environment	Storage Temperature (°C)	-40 – +70
	Operating Temperature (°C)	0 – +50
	Humidity (%RH)	0 – 90
	Max Altitude (Ft.)	40,000


P1 - DC Power Output	
Type: MS3406D10SL-3S	
Pin	Signal
A	+12 VDC
B	Ground
C	Ch Ground

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF GENERAL DIGITAL AND IS NOT TO BE DISCLOSED, REPRODUCED OR PUBLISHED WITHOUT WRITTEN CONSENT FROM GENERAL DIGITAL. THIS DOCUMENT MUST BE RENDERED ILLEGIBLE WHEN BEING DISCARDED. © COPYRIGHT 2013. ALL RIGHTS RESERVED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:  
 FRACTIONS DECIMALS ANGLES  
 ±1/32 .X ±.050 ±0° 30'  
 .XX ±.031  
 .XXX±.020

CONNECTOR CHART		
DESIGNATION	FUNCTION	TYPE

MECHANICAL OUTLINE ONLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. U.O.S. ALL DIMENSIONS ARE IN INCHES.	
APPROVALS	DATE
DRAWN M.M	05-20-20
CHECKED	
APPROVED JH	05/20/20
DO NOT SCALE DRAWING	



**GENERAL DIGITAL**  
*The Innovators of Flat Panel Technology*  
 8 Nutmeg Road South, South Windsor, CT 06074  
 (860) 282-2900 www.GeneralDigital.com

<b>POWER SUPPLY - 100 W</b>			
<b>47-63 Hz VAC INPUT W/PFC, +12VDC OUT</b>			
<b>B</b>	CAGE CODE 1JA77	DWG. NO. 1105-041-97-A	REV A