

# BARRACUDA SLIM STANDALONE SOLAR™ 15.6

Environmentally Sealed, Rugged Standalone/VESA Mount, Sunlight Readable, Ultra-thin 15.6" LCD Monitor

## STANDARD FEATURES

- » Sealed, IP67-compliant enclosure, keypad, connectors
  - › GORE® pressure equalization filter protects seals
- » Military-grade enclosure designed to comply with:
  - › MIL-DTL-901E
  - › MIL-STD-464C
  - › MIL-STD-461G
  - › MIL-STD-167-1A
- » Overall unit depth of just 1.7 inches (43.18 mm)
- » High brightness 15.6" LCD with high definition resolution of 1920 x 1080
- » General Digital-designed low profile PCB for video processing and power
- » EMI mesh and antireflective protective glass
- » Rear-mounted studs in standard 100 mm VESA pattern for pedestal or arm mounting


## AVAILABLE OPTIONS

- » NVIS-compatible backlighting
- » Industrial- and military-grade connectors
- » Numerous display enhancements
- » Powder coat and wet paint finishing in a wide variety of colors, including Desert Tan as shown here



Barracuda Slim Standalone Solar 15.6  
mounted to optional pedestal

# BARRACUDA SLIM STANDALONE SOLAR™ 15.6

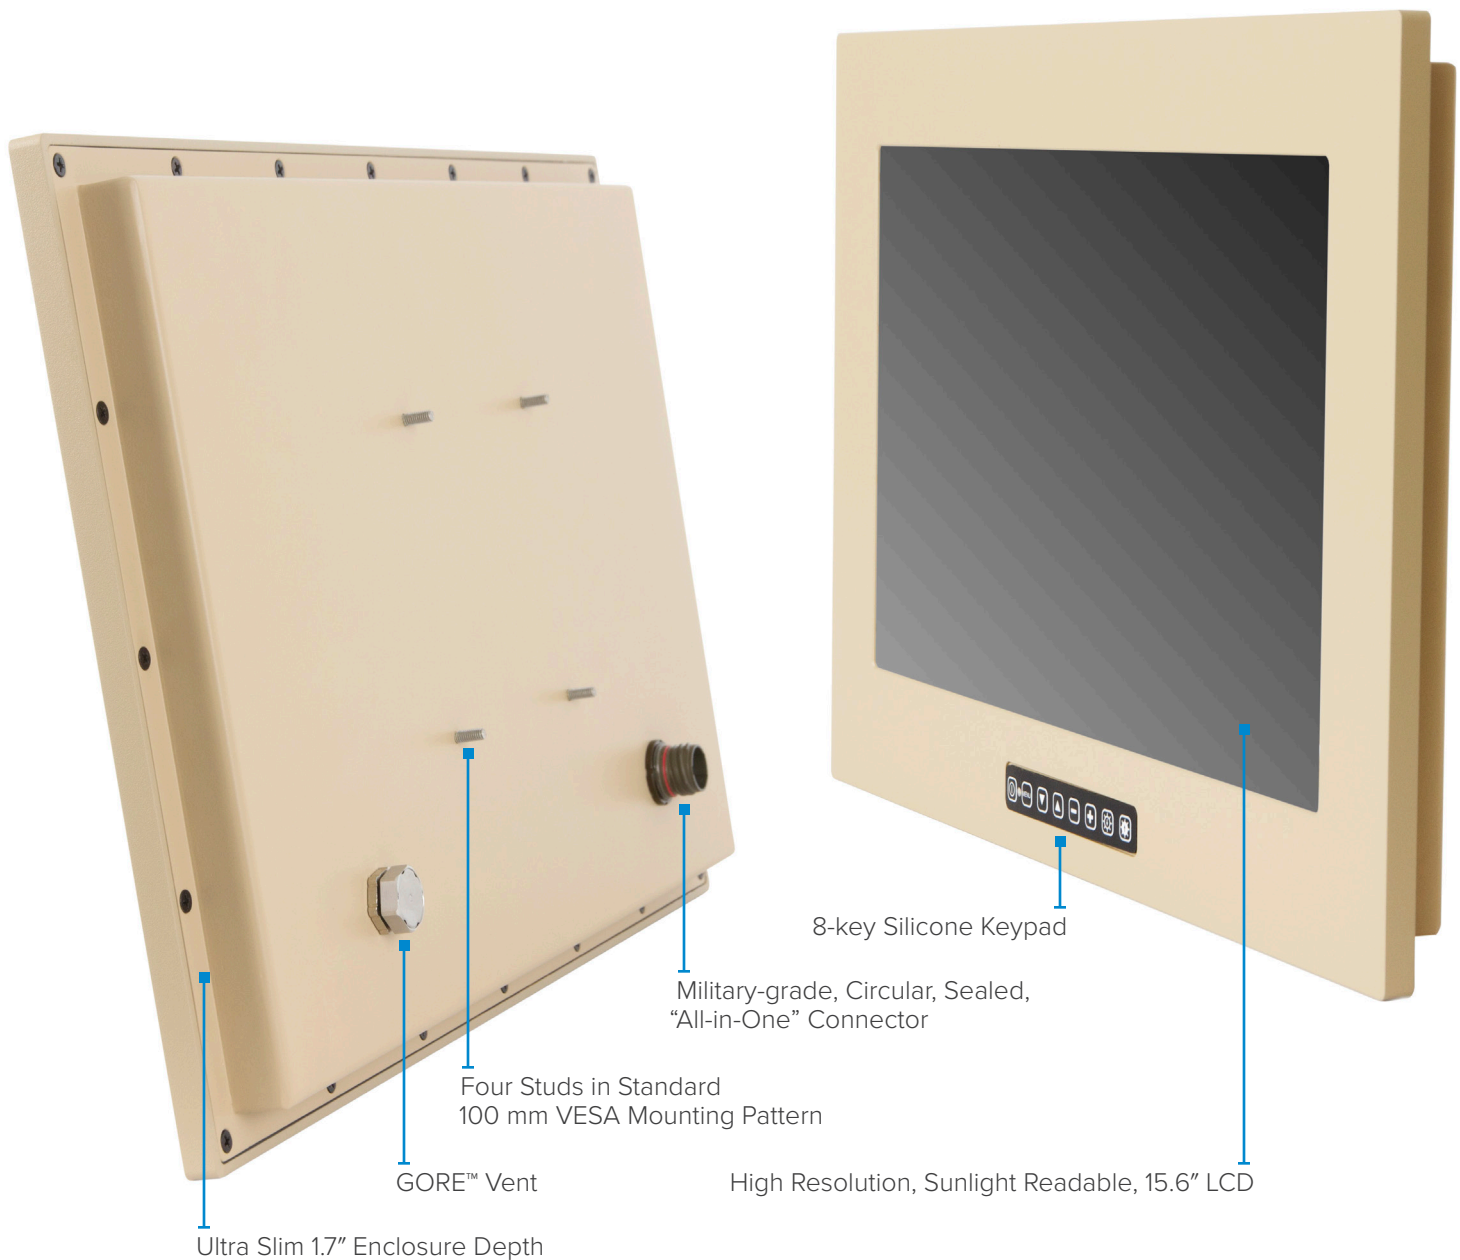

60 Prestige Park Road

East Hartford, Connecticut 06108

Phone 860.282.2900 | Toll-Free 800.952.2535

E-mail [gdc\\_info@generaldigital.com](mailto:gdc_info@generaldigital.com)



999-0902-001r2

## DISCLAIMER

Information contained in this document is proprietary to General Digital Corporation and is current as of publication date. This document may not be modified in any way without the express written consent of General Digital. Product processing does not necessarily include testing of all parameters. General Digital reserves the right to change the configuration and performance of the product and to discontinue product at any time. **The appearance of U.S. Department of Defense (DoD) visual information does not imply or constitute DoD endorsement.**

© 2019 General Digital Corporation. All rights reserved.

All product names are trademarks of their respective companies.