

# PS-1U-1275-PFC

90-1105-051





UNIT SPECIFICATIONS		
FEATURE	VALUE	UNIT
<b>INPUT</b>		
INPUT VOLTAGE	85 - 264	VAC
FREQUENCY	47 - 63	Hz
<b>OUTPUT</b>		
OUTPUT VOLTAGE	+12	VDC
CURRENT	6.30	AMPS
POWER (EST)	75	WATTS
<b>ENVIRONMENTAL</b>		
OPERATING TEMPERATURE	-10 - +50	°C
STORAGE TEMPERATURE	-20 - +75	°C
HUMIDITY	20 - 95 NON-CONDENSING	% RH
ALTITUDE (MAX)	10,000	FEET

## ACCESSORIES:




01-999 - USERS MANUAL

38-502 - AC LINE CORD, SHIELDED, 6 ft. 7 in. , NEMA 5-15P

200-003-021 - EXTERNAL DC CABLE, RM121BPG-6PH --> DE-2W2-S, 6'

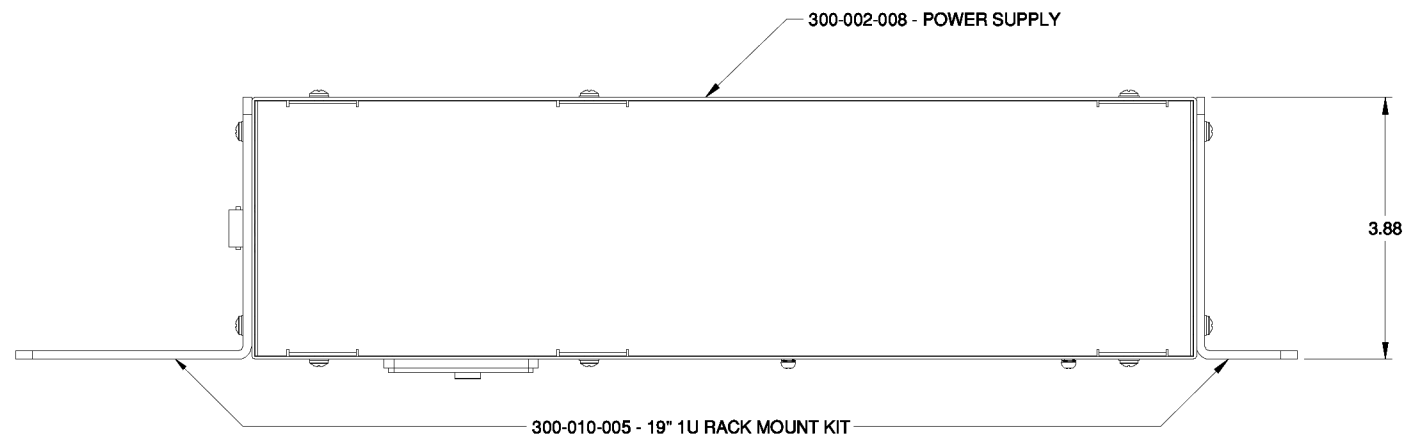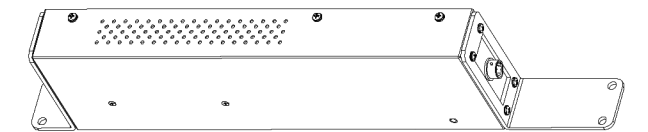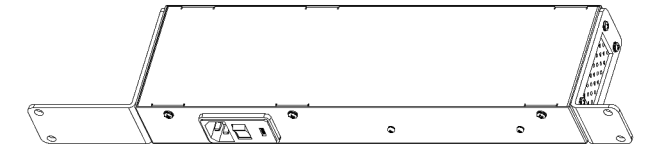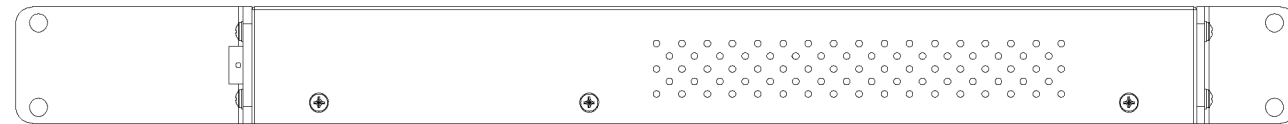

DC INPUT (CN1)	
RM12BRD-6S	
PIN #	SIGNAL NAME
1	+12VDC
2	+12VDC
3	GROUND
4	GROUND
5	N/C
6	N/C

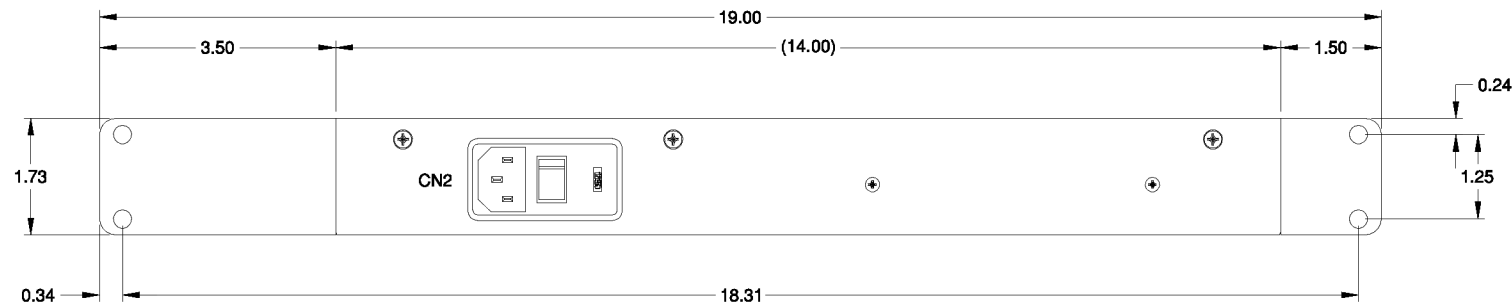

NOTE: DIMENSIONS IN PARENTHESIS REPRESENT THE POWER SUPPLY.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF GENERAL DIGITAL AND IS NOT TO BE DISCLOSED, REPRODUCED OR PUBLISHED WITHOUT WRITTEN CONSENT FROM GENERAL DIGITAL. THIS DOCUMENT MUST BE RENDERED ILLEGIBLE WHEN BEING DISCARDED. © COPYRIGHT 2019. ALL RIGHTS RESERVED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:  
 FRACTIONS DECIMALS ANGLES  
 ±1/32 .X ±.050 ±0° 30'  
 .XX ±.031  
 .XXX±.020

CONNECTOR CHART		
DESIGNATION	FUNCTION	TYPE
CN1	+12 VDC OUTPUT	RM12BRD-6S
CN2	AC INPUT	IEC-320

MECHANICAL OUTLINE ONLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. U.O.S. ALL DIMENSIONS ARE IN INCHES.

APPROVALS	DATE
DRAWN C.P.	09-May-19
CHECKED S.B.	09-May-19
APPROVED J.H.	09-May-19

DO NOT SCALE DRAWING



Engineering What's Next  
 8 Nutmeg Road South, South Windsor, CT 06074  
 (860) 282-2900 www.GeneralDigital.com

POWER SUPPLY - 75W  
 19.0" RACK MOUNT

REV	DATE	ECN	DESCRIPTION	BY

<b>B</b>	CAGE CODE	DWG. NO.	REV
	1JA77	1105-051-97	-